



DEXTERI+

Wellfit



IEC 60903:2014
EN 60903:2003
IEC 61482-1-2 class 2



FIELD OF USE

Personal protection against electrical shocks for live working from 500 to 36000V (class 00 to class 4).

These gloves with integrated mechanical properties, avoid the use of overgloves. They ensure a very good protection against electric arc.

The use of thin cotton under gloves is recommended for a better comfort and a good hygiene.

CARACTERISTICS

- Insulating gloves from class 00 (500V) to class 4 (36 000V)
- Wellfit: improved comfort of use thanks to a softer and suppler finish enhancing the dexterity.
- Cut edges
- Material : natural rubber
- Temperature of use : -25°C to +55°C
- Category: RC (Acid, Ozone, Oil and cold)
- Higher resistance to mechanical puncture, abrasion, cutting and tear, following the 60903 "composite" requirements; the gloves with mechanical properties have the symbol "hammer".
- Colour : Bi-colour for class 00 to 4 (external Orange and internal natural)
- Gloves marking following IEC 60903:2014
- Colour label for each class (see table 1)
- Flash code for traceability : direct access to test report
- Delivered in individual packaging: this packaging provides UV protection

STANDARD

- IEC 60903:2014 – EN 60903:2003
- Arc Flash:  ASTM F2675 / F2675M : ATPV 12 cal/cm²
IEC 61482-1-2 class 2 (Box: 7kA / 30 cm)


RANGE

References	Class	Arcflash protection IEC 61482-1-2	Colour Label	Voltage max	
				AC	DC
CGM-00-*	00	Class 2	beige	500	750
CGM-0-*	0	Class 2	Red	1 000	1 500
CGM-1-*	1	Class 2	White	7 500	11 250
CGM-2-**	2	Class 2	Yellow	17 000	25 500
CGM-3-**	3	Class 2	Green	26 500	39 750
CGM-4-***	4	Class 2	Orange	36 000	54 000

(*) Add the size : 07 to 12, (**) Add the size : 08 to 12, (***) Add the size : 09 to 12

Table 1

IEC LABEL

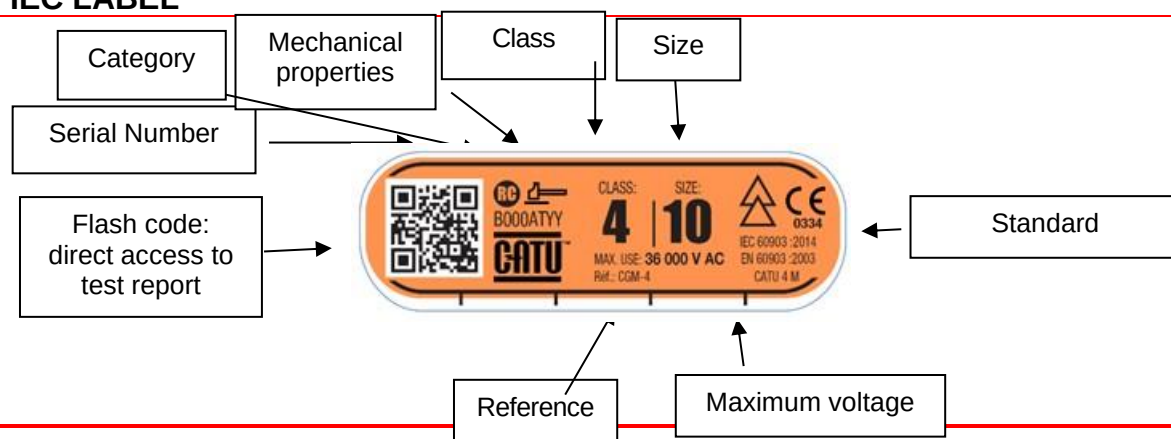

DIMENSIONS (mm)

References	Length (1) (Inch)	Nominal Thickness (mm)
CGM-00-*	14	2.25
CGM-0-*	14	2.25
CGM-1-*	14	2.26
CGM-2-**	14	2.82
CGM-3-**	14	3.35
CGM-4-***	16	3.46

(1) Other length on request

PACKAGING

The insulating gloves are delivered in an individual flexible plastic bag.

ACCESSORIES (Option)



Cotton under-gloves
CG-80



Cotton mittens gloves
CG-81



Pneumatic tester
CG-117



Gloves box
CG-35/2

STORAGE RECOMMENDATION :

Gloves should be stored in their container or package. Care should be taken to ensure that gloves are not compressed, folded or stored in proximity to steam pipes, radiators or other sources of artificial heat or exposed to direct sunlight, artificial light or other source of ozone. It is desirable that the ambient temperature be between 10°C and 21°C.